

# Release Notes

Polycom® QDX™ 6000, Version 3.0.1



Polycom is pleased to announce the software release of Polycom QDX 6000. This document provides information about the Polycom QDX 6000 system and version 3.0.1 software.

For more information about using the features described in this document, refer to the product documentation available at [www.polycom.com/videodocumentation](http://www.polycom.com/videodocumentation).

## Polycom® QDX™ 6000 Introduction

The Polycom QDX 6000 delivers high quality DVD resolution video and CD quality audio along with simple-to-use content sharing capabilities:

- Easy to deploy and simple-to-use and maintain without the need for IT support
- Affordability speeds your return on investment (ROI)
- Increased productivity in any environment thanks to expanded video and audio inputs



## Inputs and Outputs

The Polycom QDX 6000 has the following interfaces:



Type	Description
5 video inputs	<ul style="list-style-type: none"> <li>S-video with RS232 control, IR and power for EagleEye QDX 6000</li> <li>VGA input</li> <li>S-video</li> <li>2 x composite: VCR and another video source</li> </ul>
6 video outputs	<p><b>Main Display:</b></p> <ul style="list-style-type: none"> <li>Component</li> <li>S-Video</li> <li>Composite</li> </ul> <p><b>2nd display:</b></p> <ul style="list-style-type: none"> <li>VGA 2<sup>nd</sup></li> <li>S-video</li> <li>composite</li> </ul>
4 audio inputs	<ul style="list-style-type: none"> <li>Stereo Line in– 2 x RCA</li> <li>Stereo VCR – 2 x RCA</li> <li>2 x Polycom analog microphone - RJ11</li> </ul>
2 audio outputs	<ul style="list-style-type: none"> <li>Stereo main output – 2 x RCA</li> <li>Stereo VCR – 2 x RCA</li> </ul>
Other	LAN NIC – RJ45 10/100 RS 232 - Used for Polycom service Internal universal power supply – Power switch


## Polycom EagleEye QDX 6000 Camera



POLYCOM EagleEye QDX 6000 Camera supports 16:9 4CIF/4SIF formats.

### Remote control

You use the remote control to place calls, adjust the volume, navigate screens, and select options.

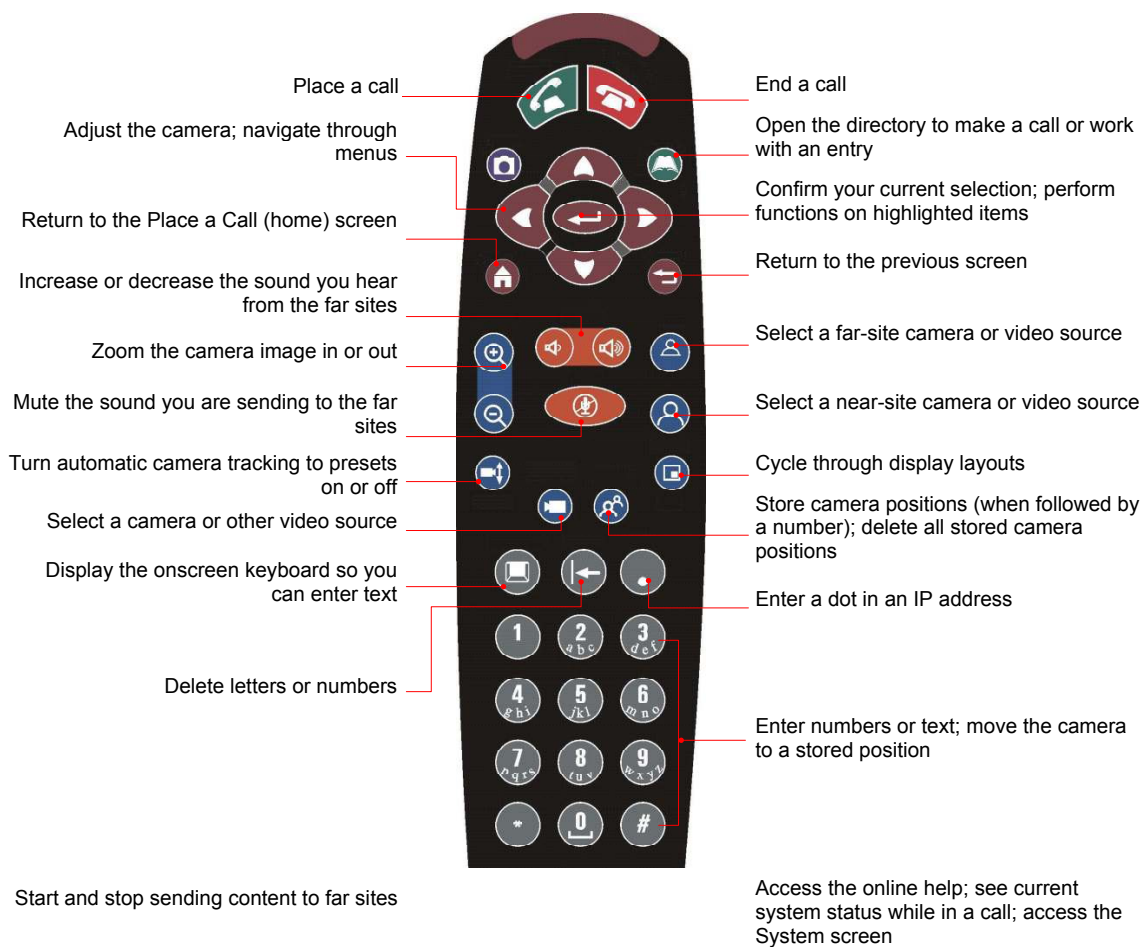

## Microphones



Polycom QDX 6000 system provide 2 analog directional Microphones, QDX 6000 System support stereo surround with 2 microphones.

## Software Features

The following sections highlight the major software features of Polycom QDX 6000. For more details, please refer to QDX 6000 datasheet, “Administrator’s Guide for Polycom QDX 6000 Systems”, and “User’s Guide for Polycom QDX 6000 Systems”.

### High quality Standard -Definition Video

QDX 6000 system can deliver high resolution DVD-like resolution video at bandwidth from 256K to 4M.

Maximum 4CIF/4SIF capacity for different video protocol

Bandwidth	Resolution/Frame Rate	Video Protocol
256K – 2M	4CIF /25fps, 4SIF/30fps	H.264
1M-4M	4CIF /25fps, 4SIF/30fps	H.263

### High quality Audio






- CD quality audio
- Polycom Siren™22
- Stereo voice (When using 2 of Polycom microphones)
- AEC/AGC/ANS

### Content sharing

- H.239 for content sharing
- 5 video inputs, any one of which can dynamically be sent as content input.
- Polycom PPCIP as the content input.
- People and content video can be displayed on single screen using Dual Monitor Emulation or 2 separate monitors.
- H.264 content

## Customized Logo

You can customize the following logos shown on your Polycom QDX 6000 system in the on screen UI and the web interface. For more information about logo customization, please refer to *Administrator's Guide for Polycom QDX 6000 Systems*.

Splash screen shown on system startup	
Logo on the top right corner of the home screen	
Logo on the top left corner of each page on web interface	
Image on the welcome screen on web interface	
Screen saver image on embedded UI	

## Caption

QDX 6000 system supports meeting caption and rolling caption with adjustable color and position.

- Site name – To indicate who you are or where you are , especially for multipoint conference.

- Share message – To indicate purpose of this meeting or send meeting notice in a big conference. For example, you can send a notice in training “Our training will start at 8:30 am tomorrow morning, not 9:00 am, please join on time. Thanks!”
- Compatible with all standard H.323 endpoint and MCU , will not be filtered through MCU



## LPR

QDX 6000 Supports Polycom LPR (Lost Packet Recovery) technology to ensure good video quality even in difficult network environment with packet lost.

## What's new in V3.0.1

The following table lists the new features and bug fixes in V3.0.1.

Feature or Bug fixes	Description
EagleEye QDX camera controls	To implement the EagleEye HD camera control features of the HDX on the QDX 6000. This is to be implemented in the Web UI only: Including White Balance Brightness etc.
Color performance adjustment	Add color performance adjustment menus to control color performance of EagleEye on the "Cameras" screen of web UI
English string fixes	Several strings in English on the UI of the Endpoint Upgrade utility have been modified
Sony Camera integration	The Sony D70 Camera can't be detected when hot-plug , need to be fixed .

## Known Limitations

The following table lists the known feature limitations for the version 3.0.1 release. If a workaround is available, it is noted in the table.

Feature	Limitation
Global Directory	The system response to user interactions will be slow when items is above 2000
Global Directory	Requiring patience is needed for thousands of Directory refresh in WEB UI , because it need to take a long time to download the entries , please wait for the download completed , don't leave this page , otherwise it has to be download again .
“LoginOK” traps	This trap is not triggered when user log in from the web UI
“MainCameraUp and mainCameraDown” traps	The mainCameraUp trap is always triggered at system startup, regardless of camera connectivity. Neither of the traps is triggered when the camera is plugged or unplugged after system startup
Hardware	Digital Microphone and 3 <sup>rd</sup> monitor ports are reserved.
Cameras	You may see a few seconds of blue video while the Polycom QDX 6000 camera wakes up. The camera will also take a few seconds to focus after waking up.
Audio	QDX 6000 sends stereo audio from microphones only when both microphones are connected  Can not support stereo audio at 256 kbps call speed and below.
Network	Can not get IP address through DHCP when going into rescue mode with 10M LAN connected  Can not choose Auto as the Duplex Mode when choosing 10 Mbps as the LAN Speed
Video	QDX 6000 might display incomplete video from second VGA monitor when it was set as 640x480.
Content share	QDX 6000 can not support sending content with call speed of 64K.
Rolling caption	Rolling caption is not supported when the system language is set to Arabic
Interoperability	QDX 6000 does not negotiate siren 14 audio with LifeSize systems, QDX 6000 transmits and receives G722 audio  Sony XG80 does not receive video from the QDX 6000 in encrypted calls/Intermittent

Feature	Limitation
	The QDX 6000 is not receiving content from the Tandberg 6000 MXP when calling pass through Tandberg gateway . The QDX 6000 system is able to send content fine.
	QDX 6000 does not negotiate H264 4SIF video with the Aethra X7
	QDX 6000 sometimes sends content over a single stream with Sony systems , the content will replace main stream , not dual stream.
	QDX 6000 does not support “Polycom proprietary People + Content “ protocol , it is incompatible with some old Polycom view station endpoint only support this protocol “ . QDX 6000 support standard ITU-T H.239 protocol , all current standard endpoint support H.239 , QDX 6000 can be compatible with most current standard video endpoint to send and receive content .
	QDX 6000 cannot be managed by CMA server , but CMA will work with QDX 6000 when acting GK only .

## Interoperability

Polycom QDX 6000 systems are tested extensively with a wide range of products. The following list is not a complete inventory of compatible equipment; it simply indicates the products that have been tested for compatibility with the 3.0.1 release.

Video conferencing systems use a variety of algorithms to compress audio and video. In a call between two systems, each end transmits audio and video using algorithms supported by the other end. In some cases, a system may transmit a different algorithm than it receives. This process occurs because each system independently selects the optimum algorithms for a particular call, and different products may make different selections. This process should not affect the quality of the call.

Type	Product	Version
Camera	Polycom EagleEye QDX 6000 Camera	system firmware version: 109A
NAT/Firewall/Border Controller	Netgear FR114P	v1.5-14 09/06/2005
	VBP6400LF2	8.11.1
	VBP5300E and S/T	7.2.2
	Cisco QOS Router Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M),	V12.4(15)T1
Management Systems and Recorders, Content	Polycom PPCIP	1.2.1
	RSS 2000	4.0
Gatekeeper, Gateways, External MCU, Bridges, Call Managers	Polycom CMA4000	4.0
	Polycom CMA5000	4.01.00
	Polycom SE200	3.0.3/3.00.05
	Polycom Pathnavigator	V 7.00.03
	Polycom RMX 1000	V1.1.2
	Polycom RMX 2000	V4.0/V3.0.1
	Polycom MGC	9.0.1.8
	Polycom MGC Gateway	9.0.1.8
	Codian MCU	2.4.1
	Tandberg Gateway	G3.2
	Tandberg Gateway	N6.0
	Radvision ECS	5.6.2.4
	Cisco 3745 Gatekeeper	V12.4
Endpoints	Polycom HDX9001	2.5.0.2
	Polycom HDX9002	2.5.0.2
	Polycom HDX9004	2.5.0.2
	Polycom HDX8006	2.5.0.2
	Polycom HDX8000	2.5.0.2
	Polycom HDX4000	2.5.0.2
	Polycom HDX7004	2.5.0.2

Type	Product	Version
	Polycom HDX7001	2.0.3.2-21
	Polycom HDX7000	2.5.0.2
	Polycom VSX8000	9.0.1/9.0.5
	Polycom VSX7000	9.0.1/9.0.5
	Polycom VSX7000e	9.0.1/9.0.5
	Polycom VSX6000	9.0.1/9.0.5
	Polycom VSX3000	9.0.1/9.0.5
	Polycom VSX5000	9.0.1/9.0.5
	Polycom V700	9.0.1/9.0.5
	Polycom V500	9.0.1/9.0.5
	Polycom iPower 9000	6.2.0.1208
	Polycom PVX	8.0.2
	Polycom CMAD	4.0.1
	Polycom Viewstation FX/EX/4000	6.0.5
	Polycom Viewstation	7.5.4
	Polycom SoundStation IP3000	2.8
	Sony PCS –1	3.42
	Sony PCS –TL50	2.42
	Sony PCS –G50	2.63
	Sony PCS-XG80	2.0.1
	Tandberg 6000 B	B10.3
	Tandberg MXP 6000	F7.2
	Tandberg MXP 1700	F7.2
	Tandberg Edge95 MXP	F7.2
	Tandberg MXP 150	L5.1
	Tandberg 6000 E series	E5.3
	LifeSize Room System	4.0.6
	Polycom DST B5	2.0.0
	Polycom DST K60	3.0.0

Type	Product	Version
	Polycom DST K80	2.0
	Aethera X7	12.0.20
	Aethera X3	10.7.32
	Aethera VegaStar Gold	6.0.49

## Copyright Information

© 2009 Polycom, Inc. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Polycom, Inc. Polycom, Inc. retains title to, and ownership of, all proprietary rights with respect to the software contained within its products. The software is protected by United States copyright laws and international treaty provision.

## License Issues

### OpenSSL License

Copyright (c) 1998-2007 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1 Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2 Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3 All advertising materials mentioning features or use of this software must display the following acknowledgment:  
"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)"
- 4 The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact [openssl-core@openssl.org](mailto:openssl-core@openssl.org).
- 5 Products derived from this software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project.
- 6 Redistributions of any form whatsoever must retain the following acknowledgment:

"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)"

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT ``AS IS'' AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

## Original SSLeay License

Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com) All rights reserved.

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com). The implementation was written so as to conform with Netscape's SSL.

This library is free for commercial and non-commercial use as long as the following conditions are adhered to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com).

Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed.

If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used. This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1 Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
- 2 Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3 All advertising materials mentioning features or use of this software must

display the following acknowledgement:

"This product includes cryptographic software written by Eric Young (eay@cryptsoft.com)"

The word 'cryptographic' can be left out if the routines from the library being used are not cryptographic related :-).

- 4 If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement:

"This product includes software written by Tim Hudson (tjh@cryptsoft.com)"

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The license and distribution terms for any publically available version or derivative of this code cannot be changed. I.e. this code cannot simply be copied and put under another distribution license [including the GNU Public License.]

## Disclaimer

This software is provided 'as is' with no explicit or implied warranties in respect of its properties, including, but not limited to, correctness and fitness for purpose.

## Trademark Information

Polycom®, the Polycom logo design, ReadManager® SE200, and VSX® are registered trademarks of Polycom, Inc. Global Management System™, Polycom QDX 6000™, Polycom MGC™, PathNavigator™, People+Content™, Polycom EagleEye™, Polycom Lost Packet Recovery™, SoundStructure™, and StereoSurround™ are trademarks of Polycom, Inc. in the United States and various other countries. All other trademarks are the property of their respective owners.